

Tresa 6 Light Chandelier

AEC1036 | 1.0

GENERATION LIGHTING CHANDELIER

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

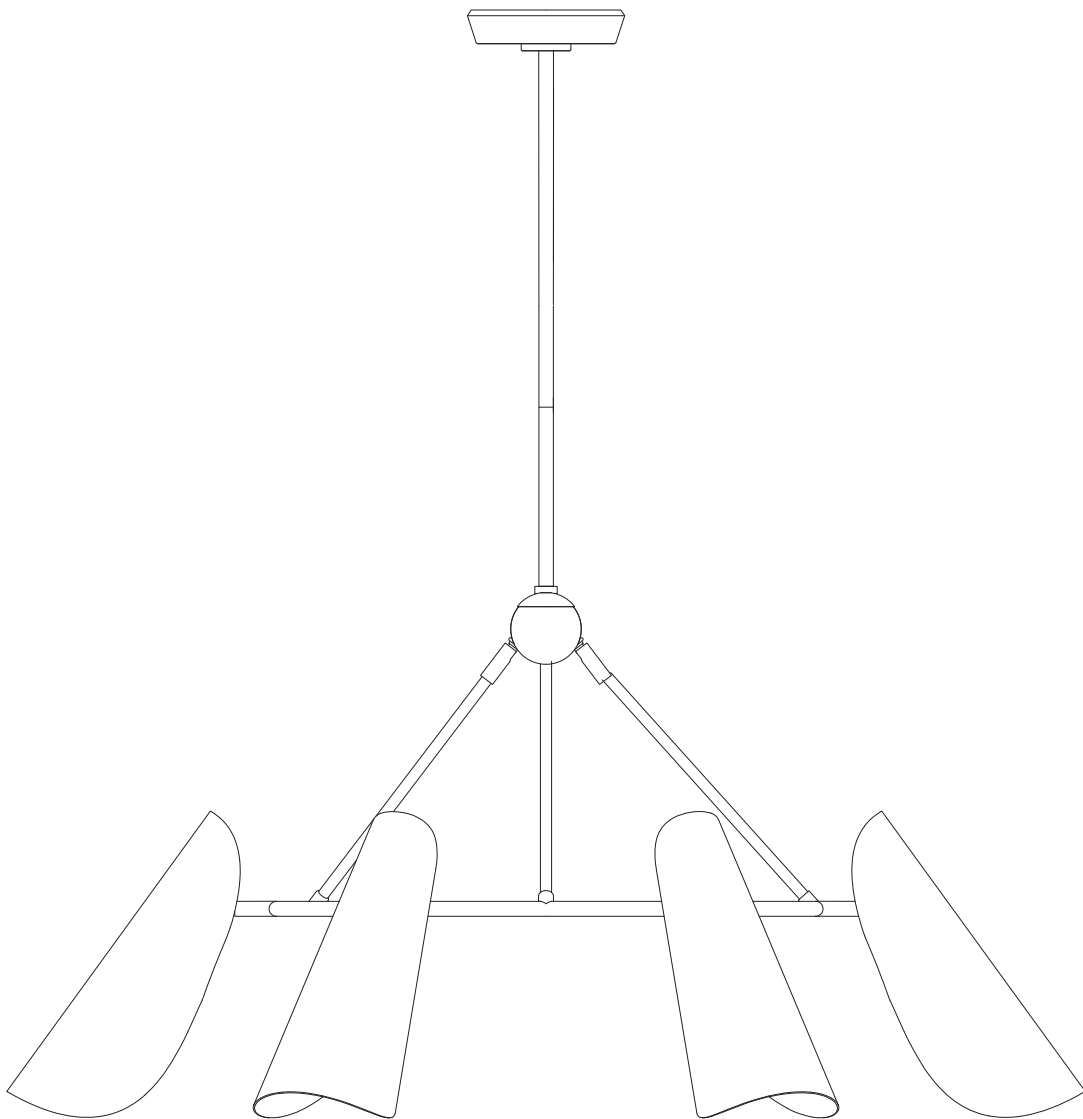


GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F 847.410.4500

www.generationlighting.com

Assemble the Lamp

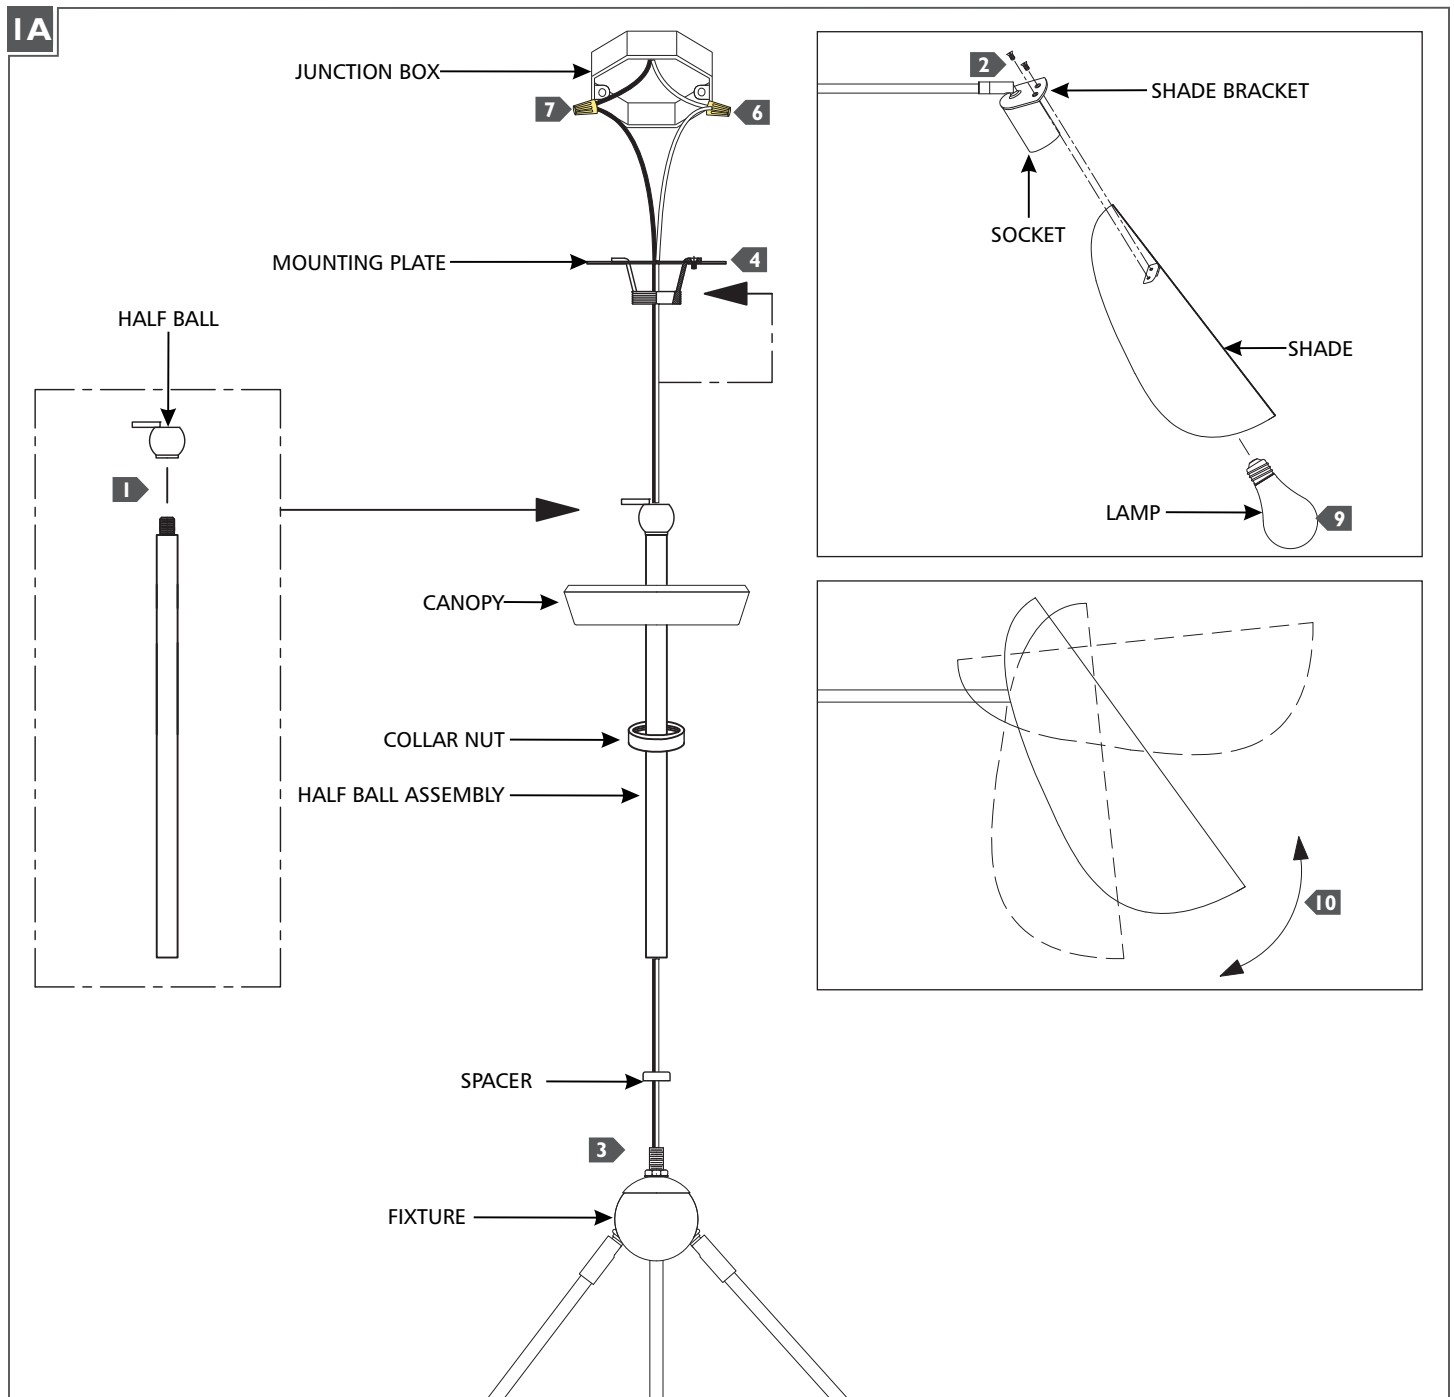

- 1** Screw the half ball to the stem.
- 2** Install the shade by aligning the holes on the shade with the holes on the bracket, then secure in place using the shade screws.
- 3** Feed the fixture wires through the spacer, collar nut, canopy and the half ball assembly, then secure the half ball assembly to the fixture by screwing it in place.
- 4** Align and secure the mounting plate to the junction box, then slide the half ball assembly onto the mounting plate.
- 5** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 6** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 7** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 8** Neatly place all the wires into the junction box, place the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto the mounting plate.
- 9** Install the lamps by screwing it completely into the socket. Refer to the label on the socket for Max Wattage Information.
- 10** Adjust the shade by gently tilting it up or down.