


# Contemporary Lighting™

PRODUCT NAME: Half Moon Wall Mount  
ITEM NUMBER: E20369

Please consult your electrician for hanging fixture and wiring.

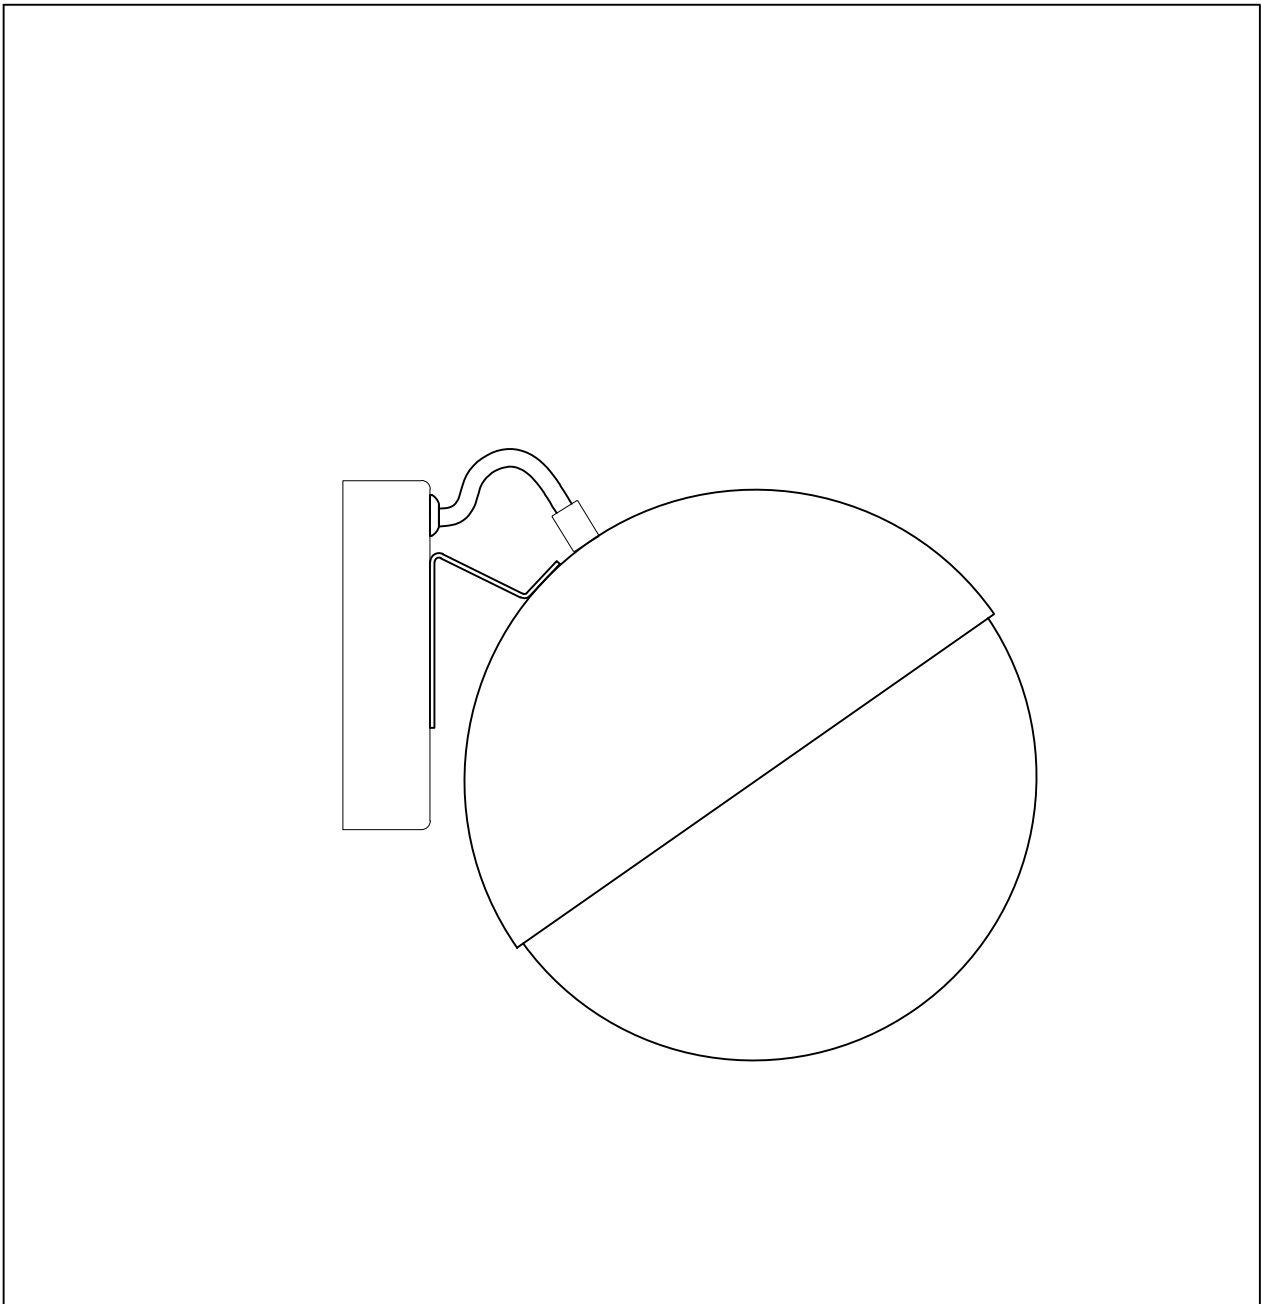

Bulb ( Included ):1\*LED\*9W

**IMPORTANT:** Turn off the power at the main fuse or circuit breaker box before starting installation



Bracket (A)



Screws (B)





Mounting Screws (C)




Back plate (D)


Locate all hardware & components before discarding packaging

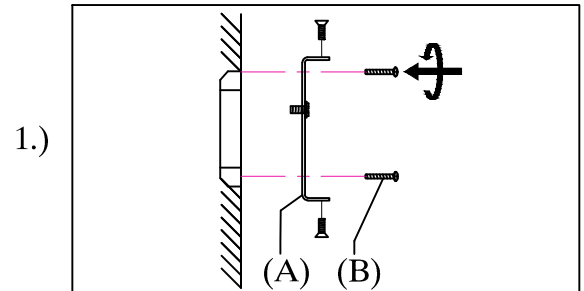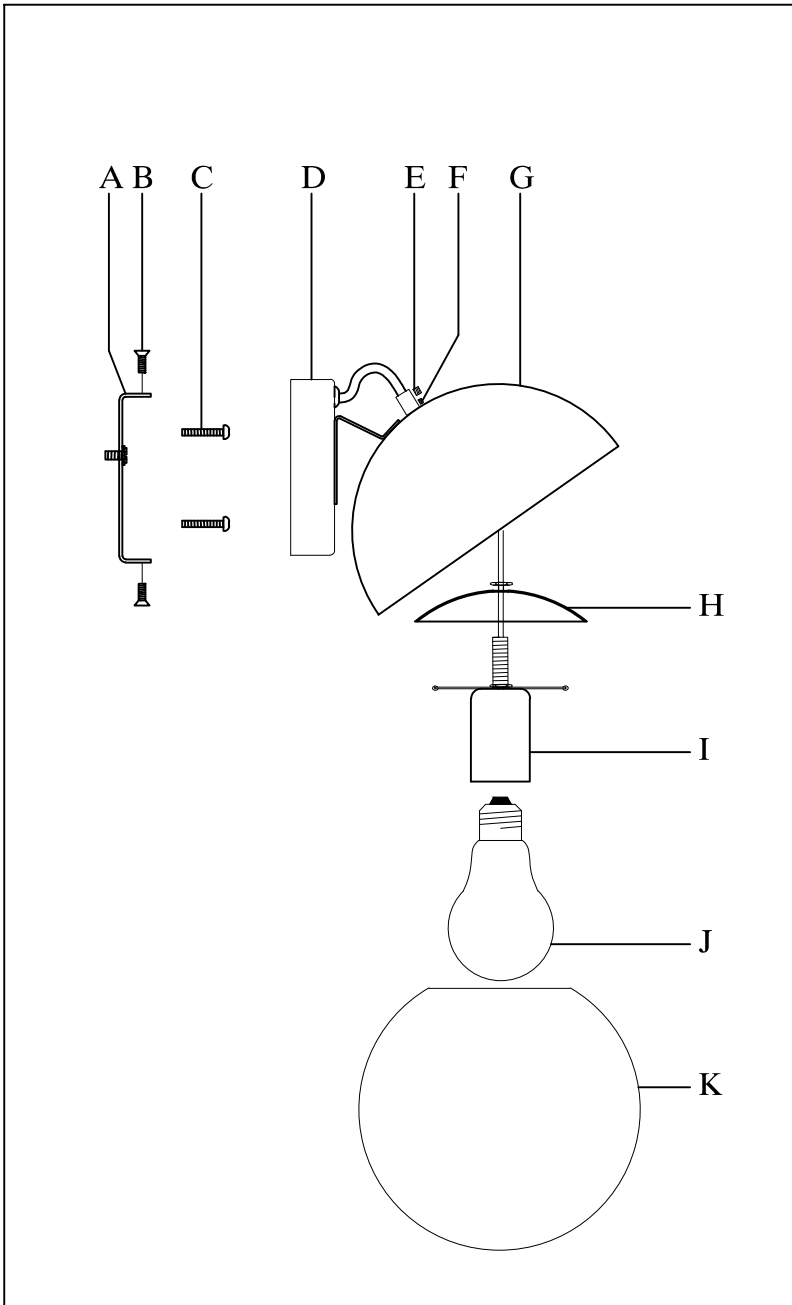

Step 1 : Remove mounting bracket from fixture and install to electrical box.

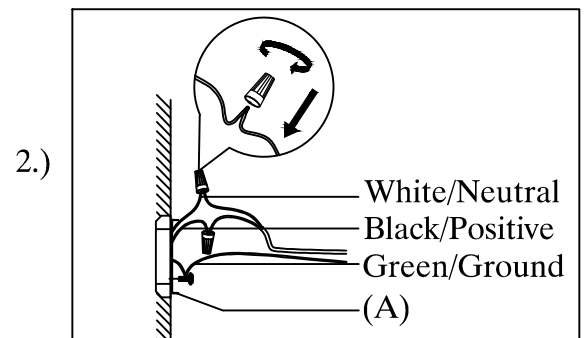


Step 2 : Wire fixture to wires in outlet box. Green wire is for Ground.

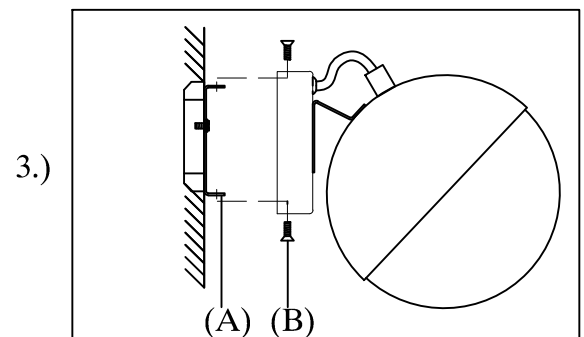



Step 3 : Install fixture to bracket and tighten screws at the ends of the Back plate to secure.

**Cleaning & Care:**  
Clean with soft cloth and a mild detergent.  
Do not use abrasive cleaner.


**IMPORTANT:** Turn off the power at the main fuse or circuit breaker box before starting installation

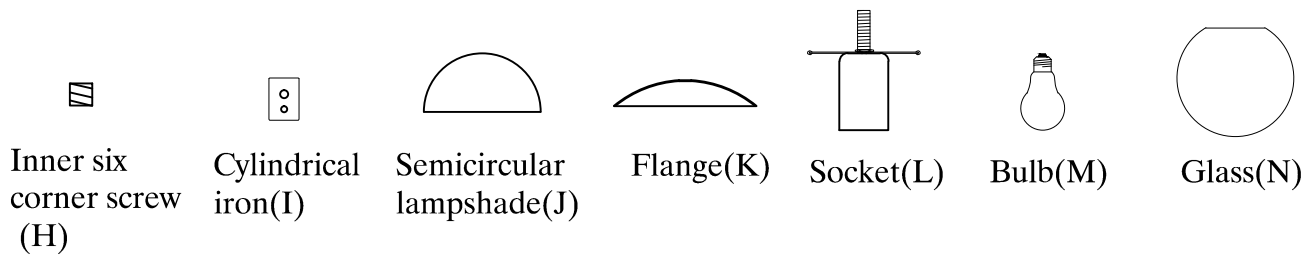


Replace glass and light bulbs - take down

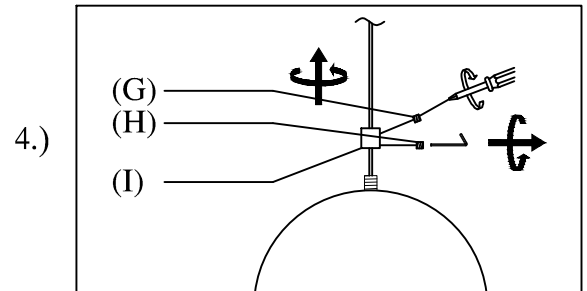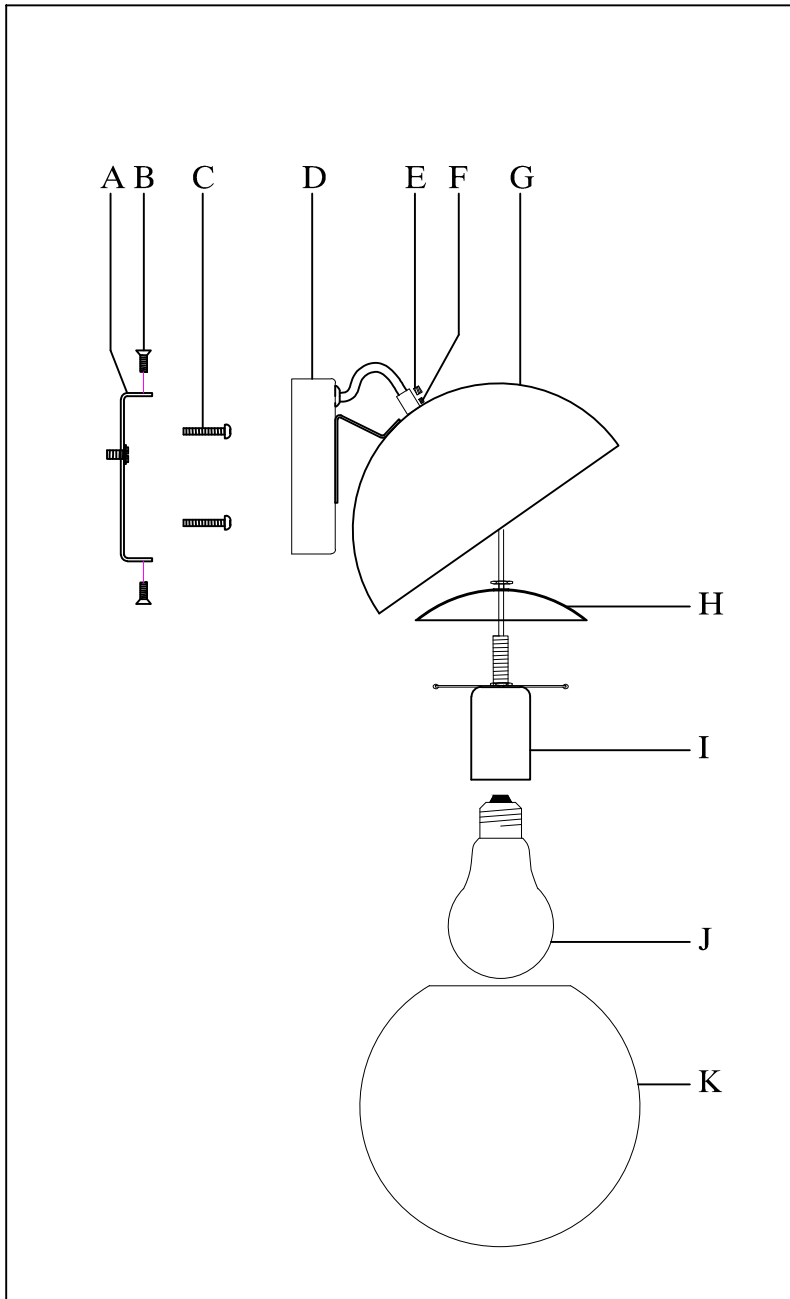

Step4 :Twist the plastic screws(G) with a screwdriver, use the six angle wrench to loosen the inner six corner screws(H), and twist the cylindrical iron(I) parts.

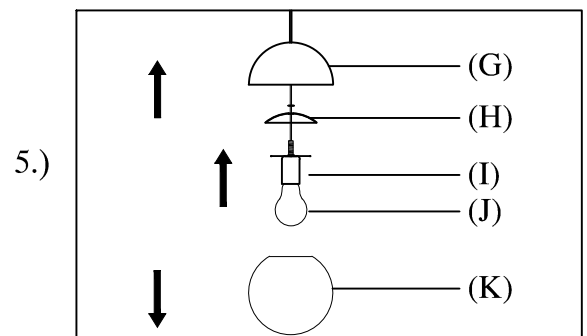


Step5 :Open the semicircle lampshade(G), twist the nut and take out the Flange(H) and the lamp socket(I) and Glass(K).

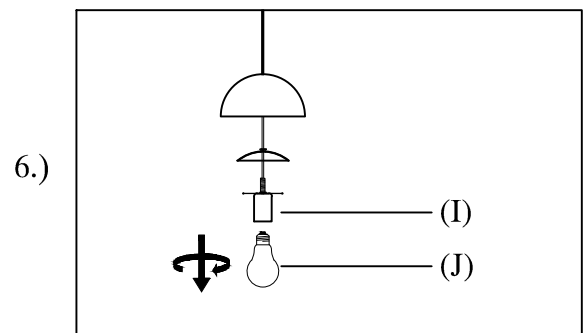


Step6 :Turn the bulb out of the socket.

**Cleaning & Care:**  
Clean with soft cloth and a mild detergent.  
Do not use abrasive cleaner.


**IMPORTANT:** Turn off the power at the main fuse or circuit breaker box before starting installation

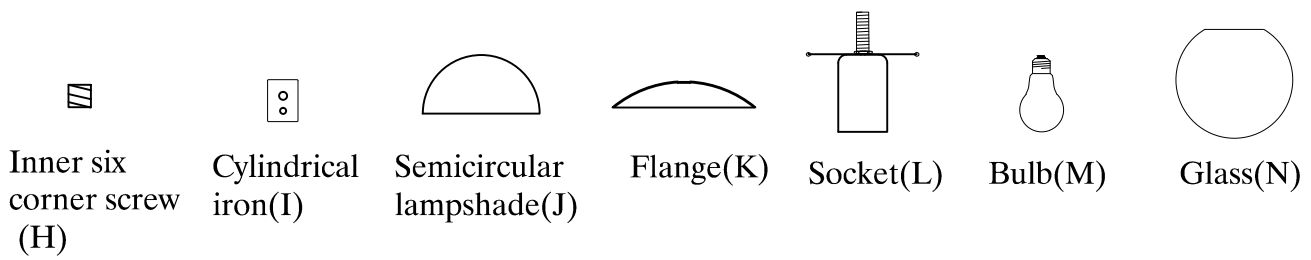


**Replace glass and light bulbs - install**

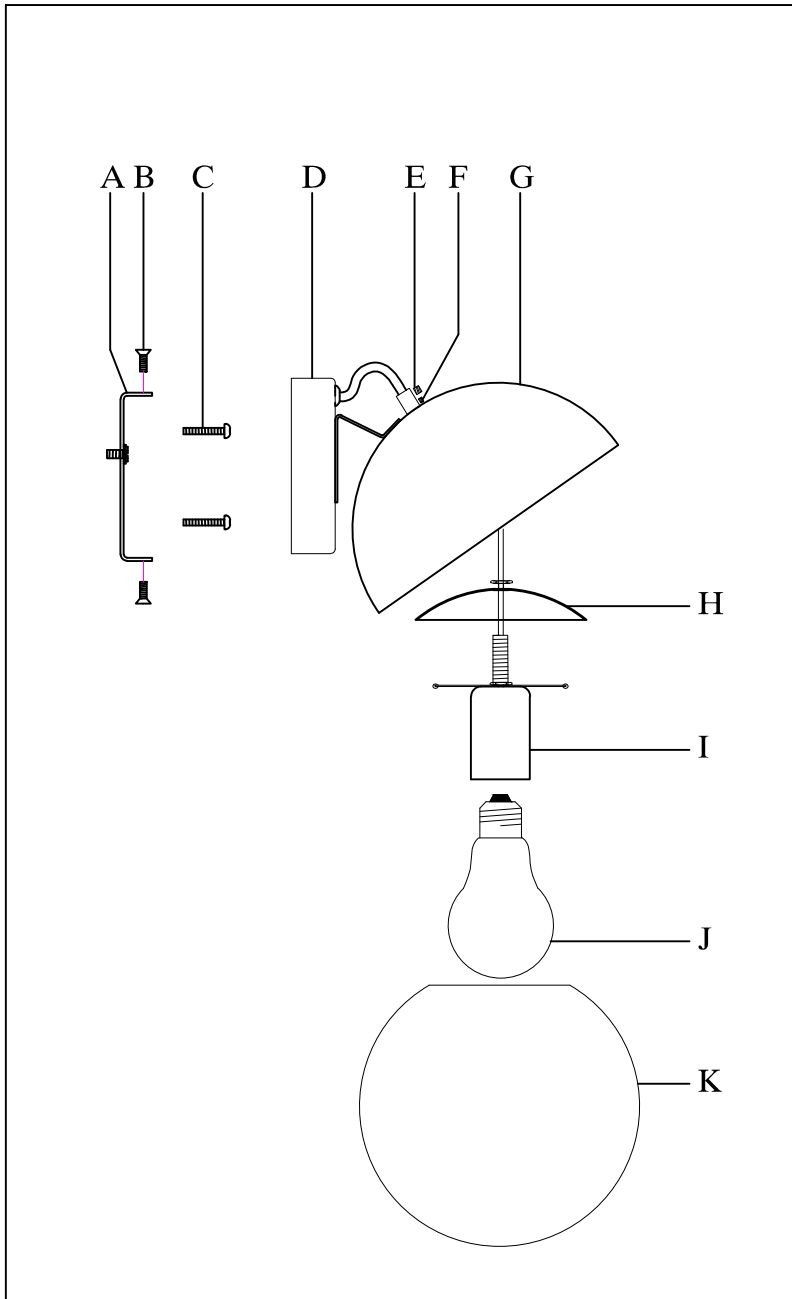


**Cleaning & Care:**  
Clean with soft cloth and a mild detergent.  
Do not use abrasive cleaner.

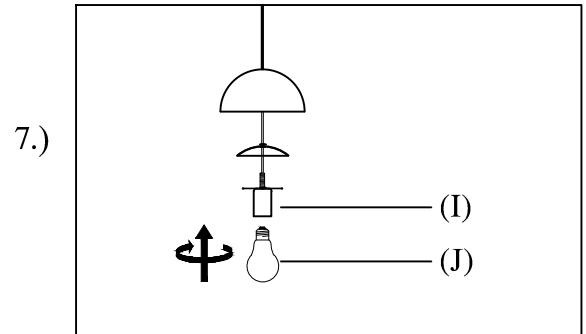

Step7 :Twist the new bulb(J) into the lamp socket(I).

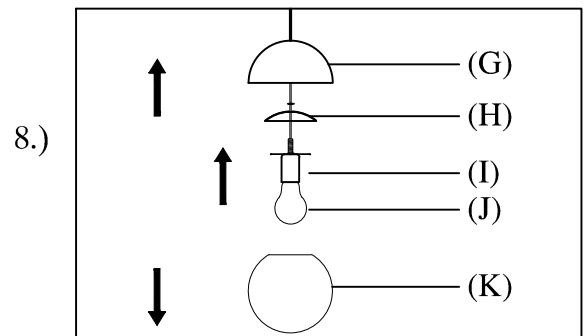

Step8 :Tilt the lamp socket(I) into the Glass(K). Place the Glass(K) flat, cover the Flange(H),tighten the nut and cover the upper Semicircular lampshade(G).

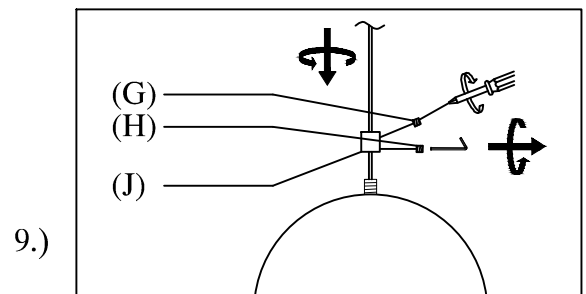

Step9 :To tighten cylindrical iron(J) parts, first lock the inner hexagonal screw(H) with an inner hexagonal wrench, and then lock the plastic screw(G) with a screwdriver.