

# NRMC2-61 / NRMC2-62

## 6" Marquise II Retrofit Reflectors

Source: 15W LED  
900lm

Type
Project
Catalog No.
Notes

### PRODUCT DESCRIPTION

The Marquise II Retrofit Series replaces existing recessed trims and light sources. Series includes Cree® COB LED with optimized beam spreads, dimmable driver and medium base socket to replace old light sources with the latest LED technology.

### FEATURES

- Retrofit existing architectural or commercial housings with the latest LED technology
- Over 80% energy savings when compared to incandescent
- Cree® COB LED Technology
- Spot, narrow or flood beam spreads
- 900lm LED package
- 2700K, 3000K, 3500K and 4000K @ 90+CRI
- 5-year Limited Warranty

### CONSTRUCTION

**Reflector:** Aluminum spun reflector with deep set diffused lens for excellent visual comfort while providing high lumen output.

**Mounting:** Trim includes friction blades to mount trim securely to housing.

### ELECTRICAL

**Lumens / Wattage:** 900lm / 15W

**Color Temperature:** 2700K, 3000K, 3500K, 4000K

**CRI:** 90+CRI

**Beam Spread: (S)** Spot, **(M)** Narrow Flood, **(F)** Flood

**Operating Temp.:** 0°C to 45°C ambient temperature

**Lifetime:** 60,000 hours @ L70

**Dimming:** Dimmable down to 10% with Triac or ELV

[Click Here](#) or check complete dimmer list at [www.NoraLighting.com](http://www.NoraLighting.com) in the "Compatibility" page under "Resources" tab

### COMPATIBLE HOUSINGS

Marquise retrofit reflectors are compatible with most 5" IC and Non-IC housings by Nora Lighting and others.

### FIRE BOX

**NFBIC-6LMRATA** 6" IC Air-Tight Fire Rated Dedicated LED

**NFBIC-6INCATA** 6" IC Air-Tight Fire Rated Line Voltage

### NEW CONSTRUCTION

**NHIC-6LMRAT** 6" IC Air-Tight Dedicated LED

**NHIC-17QAT** 6" IC Air-Tight Line Voltage

**NHIC-17QNBAT** 6" IC Air-Tight Line Voltage (No bracket)

**NH-26Q** 6" Non-IC Line Voltage

**NHIC-6G24ATFL** 6" IC Air-Tight GU24

### REMODEL

**NHRIC-6LMRAT** 6" IC Air-Tight Dedicated LED

**NHRIC-17QAT** 6" IC Air-Tight Line Voltage

**NHRIC-17QNBAT** 6" IC Air-Tight Line Voltage (No bracket)

**NHR-26Q** 6" Non-IC Line Voltage

**NHRIC-6G24ATFL** 6" IC Air-Tight GU24


**Retrofit:** Marquise retrofit series includes medium base screw-socket adapter (NRA-211SM) for retrofitting into existing medium base downlight housings. GU24 socket adapter is available for use with GU24 housings, must specify NRA-212SM.

### LABELS AND LISTINGS

- cULus classified for Wet Location when used with compatible housing
- ENERGY STAR® certified
- Can be used to comply with 2016 Title 24 - part 6 High Efficacy LED light source requirements
- [5-Year Limited Warranty](#)
- ASTM E283 for Air-Tight




### PRODUCT IMAGES AND DIMENSIONS

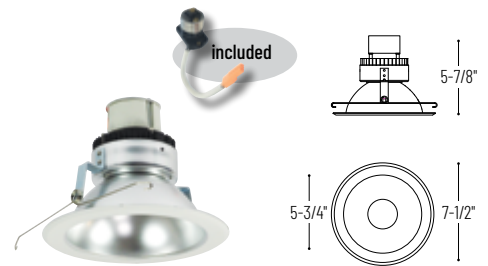

#### NRMC2-61

#### Round Open Reflector

BB, BW, BZ, CO, DB, DD, DW, HZ, HZW, MPW, NN, WW

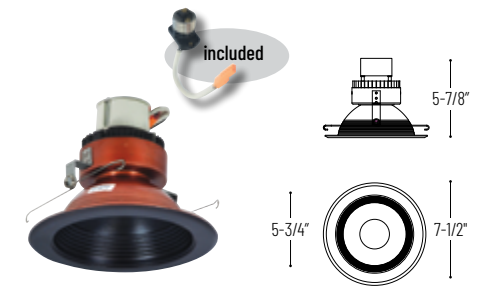

#### NRMC2-62

#### Round Baffle

BW, BZ, CO, MPW, NN, WW

## 6" Marquise II Retrofit Reflector

Reflector Type	Lumens / Wattage	Color Temp. / CRI	Beam Spread	Finish (see chart below)
<b>NRMC2-61</b> = Round Open Reflector	<b>L09</b> = 900lm / 15W	<b>27</b> = 2700K / 90 CRI	<b>S</b> = Spot	<b>BB</b> = Black / Black Flange
<b>NRMC2-62</b> = Round Baffle		<b>30</b> = 3000K / 90 CRI	<b>M</b> = Medium	<b>BW</b> = Black / White Flange
		<b>35</b> = 3500K / 90 CRI	<b>F</b> = Flood	<b>BZ</b> = Bronze / Bronze Flange
		<b>40</b> = 4000K / 90 CRI		<b>CO</b> = Copper / Copper Flange
				<b>DB</b> = Diffused Clear / Black Flange
				<b>DD</b> = Diffused Clear / Diffused Flange
				<b>DW</b> = Diffused Clear / White Flange
				<b>HZ</b> = Haze / Haze Flange
				<b>HZW</b> = Haze / White Flange
				<b>MPW</b> = Matte Powder White
				<b>NN</b> = Natural Metal / Natural Metal Flange
				<b>WW</b> = White / White Flange

## Optional Accessories

Description
<b>NRA-211SM</b> = Medium base screw-in socket (included)
<b>NRA-212SM</b> = Socket adapter for use with GU24 housings

Example: **NRMC2-61L0930WW** = 6" Marquise II Round Open Retrofit Reflector, 900lm / 15W LED, 3000K, White Reflector / White Flange