

INSTALLATION INSTRUCTIONS

For Model 8904

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Thread the nipple into crossbar (B) until snug and secure with the lock washer and hex nut provided. The length of the nipple into the crossbar may be adjusted if necessary. Attach the chain loop to the nipple and secure until snug. Attach the crossbar assembly to the outlet box with screws (B). The side of the cross bar marked "GND" must face out.
3. Carefully remove bottom finial (M) followed by hex-nut (K), bottom cover (K) and glass shade (G).
4. Use a pair of proper pliers to open one end link of the chain provided and connect to the fixture loop. Determine the desired hanging height and discard the excess chain.
5. Lace the fixture wires through the chain. Slip the lock collar over the chain followed by canopy (E) and allow them to rest on the fixture top cover (F).
6. Open the other end link of chain and attach to the chain loop. Feed the fixture wires through the loop (G) and the nipples (E).

CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar using the green screw provided.

COMPLETING THE INSTALLATION (Fig. 1)

8. Align canopy (E) to the ceiling and use the lock collar to secure canopy (F) to chain loop (G).
9. At this point, install the light bulbs type B/E12/ bulbs (not included) in accordance with the fixture specification. **--DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
10. Align glass shade (G) to top cover (F) followed by bottom cover (J) and secure with hex-nut (K) and finial (M).

Your installation is now complete. Return power to the junction box and test the fixture



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

Fig. 1

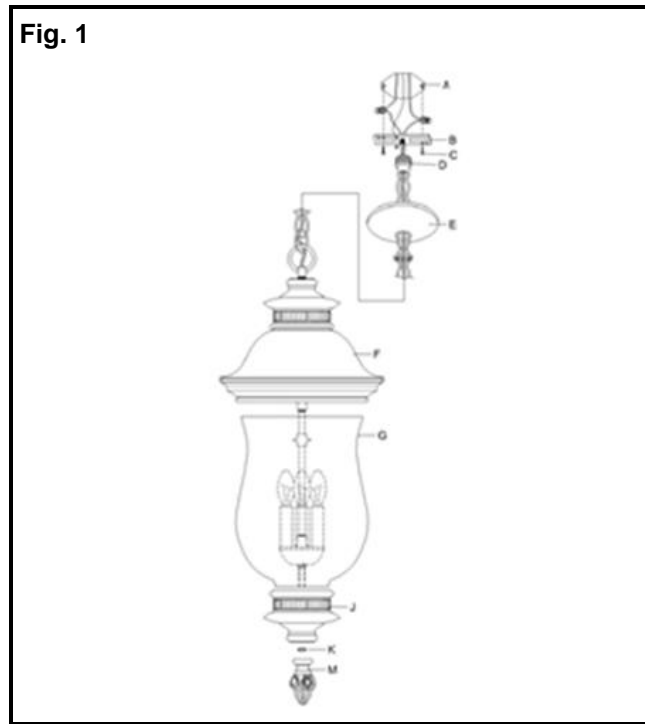


Fig. 2

