### GENERATION LIGHTING

## Wall

### **GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

#### **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

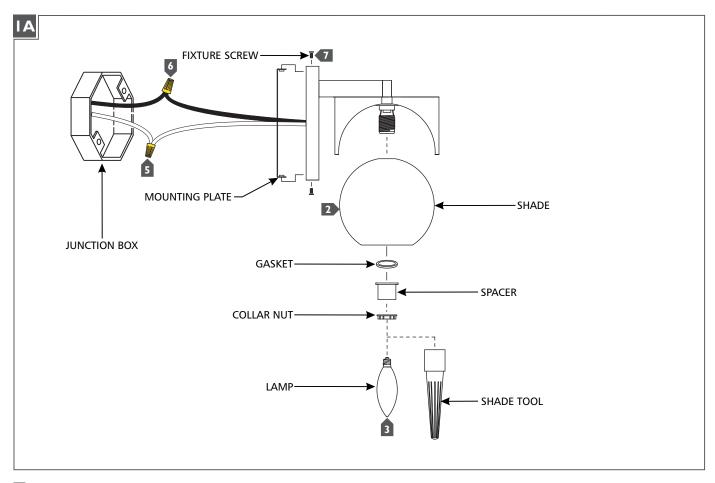

- Secure the mounting plate to the junction box.
- Place the shade, gasket, and spacer onto the socket, then secure them in place by screwing the collar nut onto the socket using the shade tool. Repeat for remaining shades.
- 3 Screw the lamp(s) into the socket(s). Refer to the label on the lamp socket for Max Wattage information.
- Connect the fixture to a suitable ground in accordance to local electrical codes.
- 5 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all wires into the junction box, place the fixture base onto the mounting plate, and secure it in place using the fixture screws.

# **SAVETHESE INSTRUCTIONS!**

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347

## www.generationlighting.com

© 2019 Generation Lighting All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.