

Rebay Wall

8643193S, 8743193S | 1.0

GENERATION LIGHTING

WALL

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.



GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347


www.generationlighting.com

© 2020 Generation Lighting. All rights reserved.
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

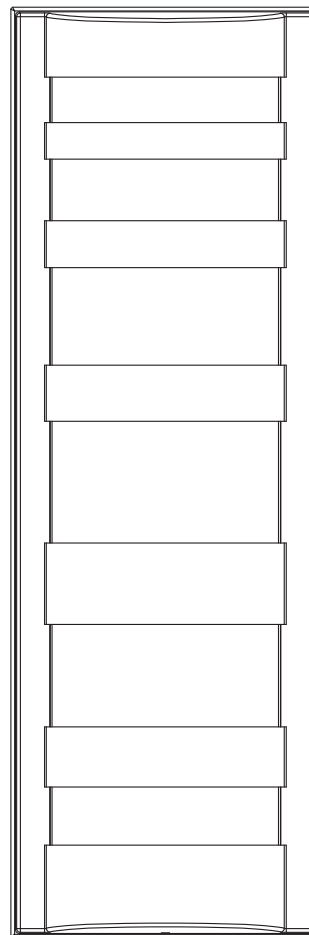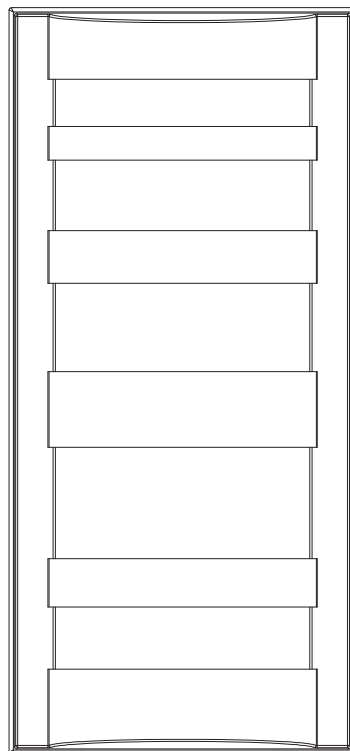

SAVE THESE INSTRUCTIONS!

Install the Fixture

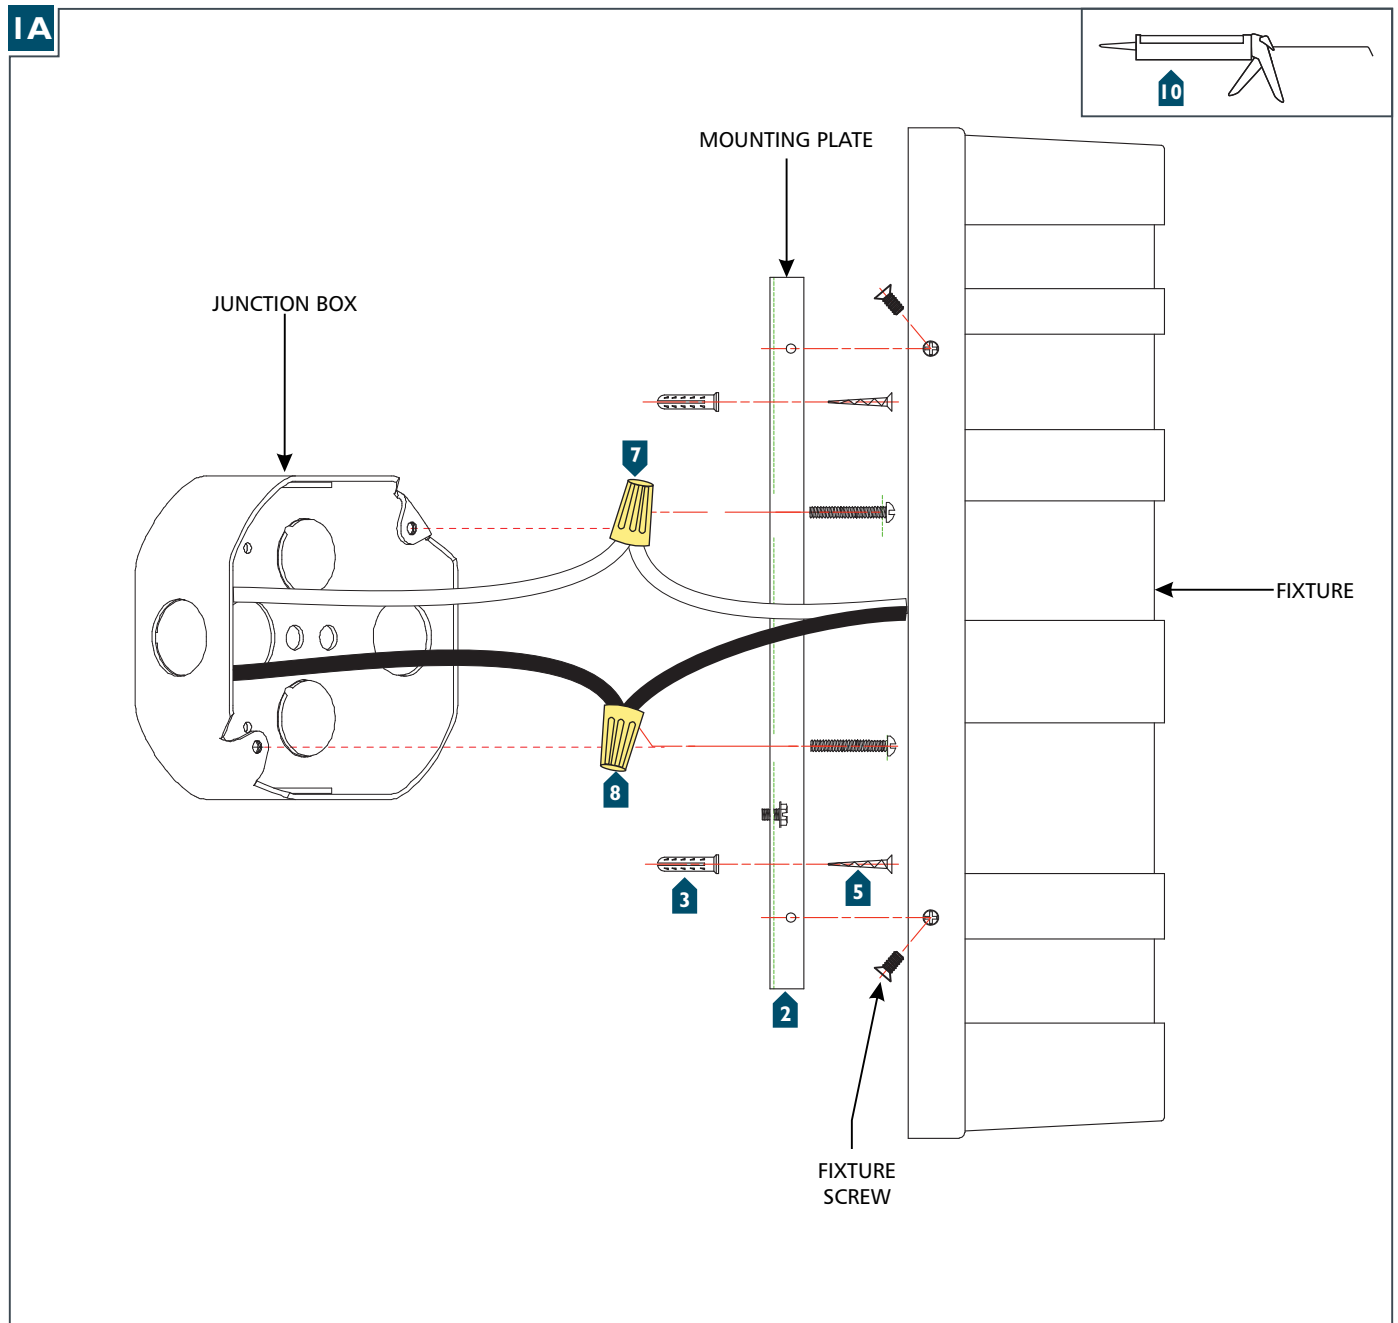

- 1 Unscrew the four fixture screws and remove the mounting plate from the fixture.
- 2 Temporarily install the mounting plate to the junction box and mark the location of the anchors, then remove the mounting plate.
- 3 Install the anchors at the marked locations.
- 4 Secure the mounting plate to the junction box.
- 5 Screw the anchor screws into the anchors.
- 6 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 7 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 8 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 9 Neatly place all the wires into the junction box, place the fixture onto the mounting plate, and secure it in place by screwing the fixture screws back into place.
- 10 **For Wet Locations**, caulk around the base of the fixture with waterproof construction sealant.